

# Lithium-ion Polymer Battery Pack


Product Datasheet · Model: 853496 · 11.1 V · 2200 mAh · 3S1P · with protective PCM board and connector

Battery pack with PCM board and connector



Surface marking: "- HYT 853496 11.1V · 2200mAh 24.42Wh · + (production date)"

Cell drawing · single cell 853496 (not to scale)

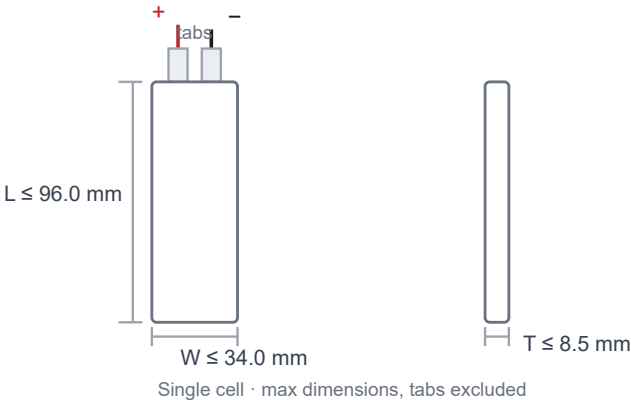

## Electrical Characteristics

|                    |                           |
|--------------------|---------------------------|
| Nominal Capacity   | 2200 mAh (0.2C discharge) |
| Nominal Voltage    | 11.1 V                    |
| Charge Voltage     | 12.6 V                    |
| Discharge Cut-off  | 9.0 V                     |
| Initial Impedance  | ≤ 200 mΩ (with PCM)       |
| Cycle Life         | ≥ 300 cycles *            |
| Capacity Retention | ≥ 90% after 28 days       |

## Mechanical Characteristics

|                         |                          |
|-------------------------|--------------------------|
| Pack Weight             | Approx. 170 g            |
| Cell Dimensions (T×W×L) | 8.5 × 34.0 × 96.0 mm × 3 |
| Pack Dimensions (T×W×H) | ≤ 27.5 × 34.5 × 101.0 mm |
| Wire                    | UL1571 24# AWG           |
| Connector               | JST PH 2.0 mm 2P (red)   |

\* Cycle life: standard charge (0.2C CC/CV to 12.6 V), 0.2C discharge to 9.0 V, end of life at 80% of initial capacity. Impedance: AC 1 kHz at 50% SOC, 25°C. All values measured at 25°C unless stated otherwise.

## PCM Specification (Seiko 3S board)

|                           |                        |
|---------------------------|------------------------|
| Over-charge Protection    | 4.250 ± 0.025 V / cell |
| Over-discharge Protection | 2.700 ± 0.080 V / cell |
| Over-current Protection   | Available              |
| Short-circuit Protection  | Available              |
| NTC                       | No                     |

## Typical Applications

- Smart Devices
- Medical Devices
- Instruments & Meters
- Backup Power
- GPS Trackers

Specifications are subject to change without prior notice. Please confirm details with SafeLith before ordering.

## Charging & Discharging

|                        |                      |
|------------------------|----------------------|
| Standard Charge        | 0.2C CC/CV to 12.6 V |
| Rapid Charge           | 1.0C                 |
| Standard Charge Time   | 6.0 h (0.2C)         |
| Max. Charge Current    | 1.0C (2.2 A)         |
| Standard Discharge     | 0.2C to 9.0 V        |
| Max. Discharge Current | 1.0C (2.2 A)         |

## Temperature Characteristics

|                       |                         |
|-----------------------|-------------------------|
| Charge Temperature    | 0 °C ~ +45 °C           |
| Discharge Temperature | -20 °C ~ +55 °C         |
| Storage < 1 Month     | -20 °C ~ +55 °C         |
| Storage < 3 Months    | -20 °C ~ +40 °C         |
| Storage < 1 Year      | 0 °C ~ +25 °C, ≤ 75% RH |

## Certificates & Documents

|               |                      |
|---------------|----------------------|
| MSDS / UN38.3 | Available on request |
| CE / RoHS     | Available on request |

# Warning and Cautions

Lithium-ion Polymer Battery Pack · Model 853496 · 2200 mAh · 11.1 V · 3S1P

---

To prevent the battery from leaking, heating or explosion, please observe the following precautions. This document should be passed on to the end user of the equipment containing this battery.

## Warning

---

- Do not immerse the battery in water or seawater. Keep it in a cool and dry environment when not in use.
- Do not discard or leave the battery near a heat source such as fire or a heater.
- Charge the battery only with a charger specifically designed for this battery type.
- Do not reverse the positive and negative terminals.
- Do not connect the battery directly to an electrical outlet.
- Do not short-circuit the positive and negative terminals with metal objects such as wires or necklaces.
- Do not transport or store the battery together with metal objects such as necklaces or hairpins.
- Do not strike, throw or trample the battery.
- Do not directly solder the battery or pierce it with a nail or other sharp object.
- Do not use damaged or deformed cells. Never disassemble the battery.
- Keep the battery away from children.

## Cautions

---

- Do not use or leave the battery at very high temperature conditions (for example, strong direct sunlight or a vehicle in extremely hot weather). Otherwise it can overheat or catch fire, and its performance and service life will be reduced.
- Do not use the battery in a location with strong static electricity or magnetic fields, otherwise the safety devices may be damaged and cause hidden dangers.
- If the battery leaks and the electrolyte gets into the eyes, do not rub the eyes. Rinse them with clean water immediately and seek medical attention.
- If the battery gives off an odor, generates heat, becomes discolored or deformed, or appears abnormal in any way during use, recharging or storage, remove it from the device or charger immediately and stop using it.
- If the battery terminals are dirty, clean them with a dry cloth before use. Poor connection may cause power failure or charging failure.

## Storage & Transportation

---

- Store batteries in a cool, dry and well-ventilated area, away from fire and heat sources. Best storage conditions:  $25 \pm 5^{\circ}\text{C}$ ,  $60 \pm 15\%$  RH.
- Store the battery at 40%-60% state of charge (approx. 3.85 V per cell). Recharge every 3 months to avoid over-discharge.
- Do not stack cartons more than 7 layers or store them upside down. Maximum temperature during transportation: below  $60^{\circ}\text{C}$ .
- Do not mix battery products with other cargo; keep them away from water and moisture.

**Note:** any items not covered in this specification shall be agreed by both parties. Dispose of the battery in accordance with local regulations.